

# TX-B3A140-010G

## PRODUCT SPECIFICATION

Approved by:

Checked by: 

Prepared by:

Part No.	TX-B3A140-010G	Spec No.	WKF-BA3069	Page	1 of 6
----------	----------------	----------	------------	------	--------

TYANSHINE 广州市添鑫光电有限公司  
Guangzhou Tianxin Photoelectric Co., Ltd

TYANSHINE 广州市添鑫光电有限公司  
Guangzhou Tianxin Photoelectric Co., Ltd

TYANSHINE 广州市添鑫光电有限公司  
Guangzhou Tianxin Photoelectric Co., Ltd

TYANSHINE 广州市添鑫光电有限公司  
Guangzhou Tianxin Photoelectric Co., Ltd

TYANSHINE 广州市添鑫光电有限公司  
Guangzhou Tianxin Photoelectric Co., Ltd

TYANSHINE 广州市添鑫光电有限公司  
Guangzhou Tianxin Photoelectric Co., Ltd

TYANSHINE 广州市添鑫光电有限公司  
Guangzhou Tianxin Photoelectric Co., Ltd

Notes:

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is  $\pm 0.25$  mm (0.01") unless otherwise noted.

Absolute Maximum Ratings at Ta=25

Notes:

- 1. Specifications are subject to change without notice.
- 2. Under the stipulated Characteristics parameters above, the




Part No.	TX-B3A140-010G	Spec No.	WKF-BA3069	Page	3 of 6
----------	----------------	----------	------------	------	--------

Characteristics at  $I_f=700mA$  ,  $V_r=5V$  ( $T_a=25^\circ C$ )

Parameter	Symbol	Values			Units
		Min.	Typ.	Max.	
Luminous Flux	$\phi_v$	35	55		lm
Viewing Angle at 50° IV	$2_{1/2}$		140		Deg
Peak Emission Wavelength	$\rho$	450	455	460	nm
Dominant Wavelength	$d$	455	460	465	nm
Spectral Line Half-Width		25	30	35	nm
Forward Voltage	$V_f$	3.2	3.6	3.8	V
Reverse Current	$I_R$			10	$\mu A$
Thermal Resistance Junction to Case	$R_{J-C}$		11.2		K/W
Temperature Coefficient of Forward Voltage	$V_{F/T}$		-2		mV/

Notes:

1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2.  $1/2$  is the off-axis angle at which the luminous intensity is half the axial luminous intensity
3. The dominant wavelength ( $d$ ) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.
4. Flux is measured with an accuracy of  $\pm 15\%$ .
5. Forward voltage is measured with an accuracy of  $\pm 0.15V$ .

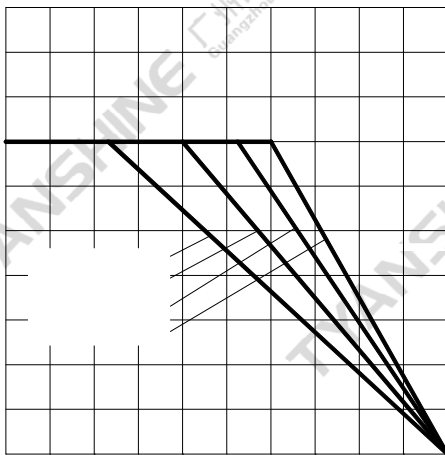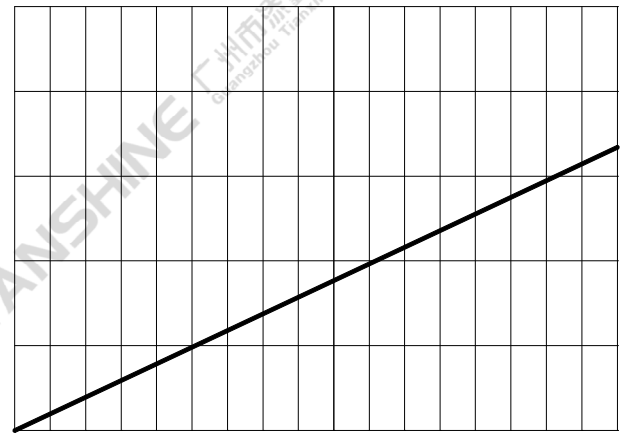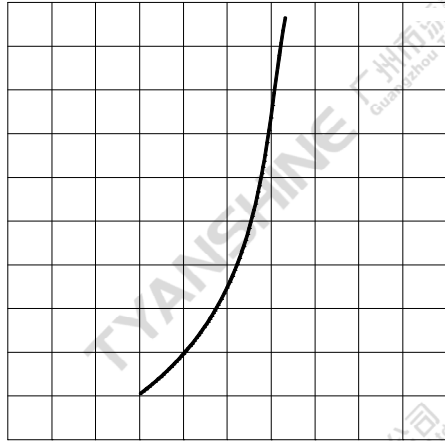

0  
1.0  
0.8  
0.6  
0.4  
0.2  
0.0  
380

Part No.	TX-B3A140-010G	Spec No.	WKF-BA3069	Page	5 of 6
----------	----------------	----------	------------	------	--------

**PRECAUTION IN USE**

**Storage**

Recommended storage environment

Temperature: 5 ~ 30 (41oF ~ 86oF)

Humidity: 60% RH Max.


**Soldering**

**Hand Soldering**


Temperature	350 Max.
Soldering time	8sec. Max.

**Dimensions for Cannulation and Packaging**

Quantity: 50PCS

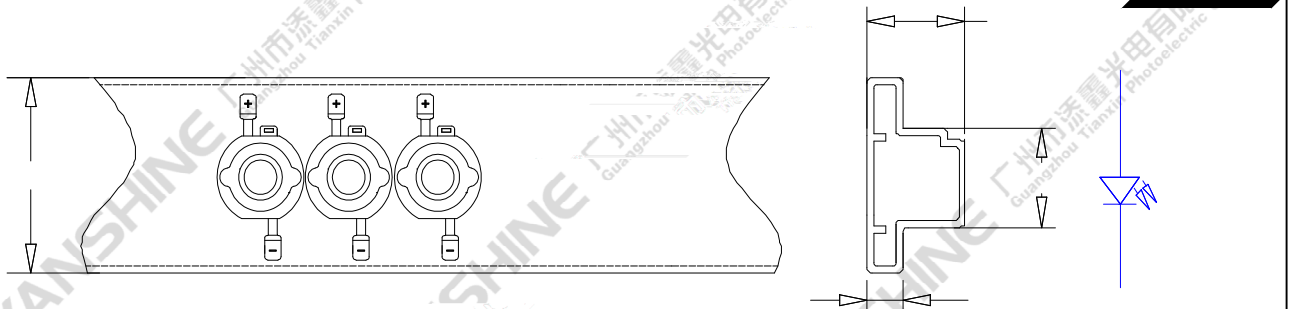

Quantity: 24PCS

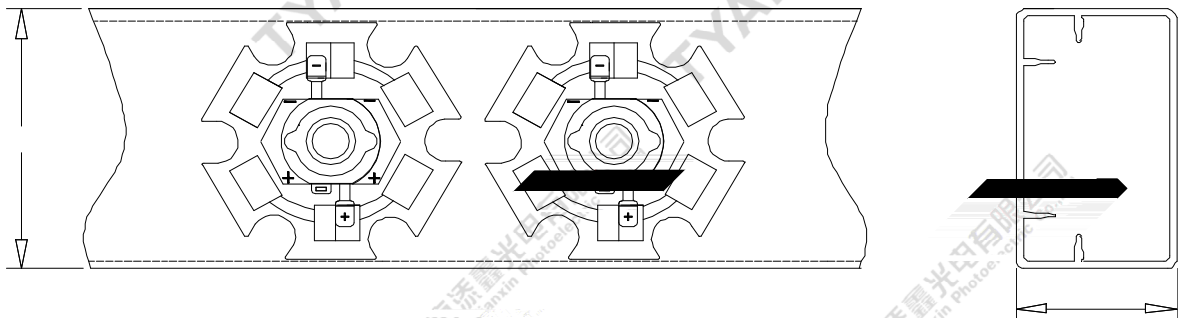

**Notes:**

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 2.0$  mm (0.08") unless otherwise noted.
3. Product is packaged with silica gel to protect the light-emitting zone. Please avoid the light-emitting area from being pressed, stressed, rubbed, come into contact with sharp metal part which would damage the product.

Part No.	TX-B3A140-010G	Spec No.	WKF-BA3069	Page	6 of 6
----------	----------------	----------	------------	------	--------