

TX-1825SW14A-2860V36-10H80

PRODUCT SPECIFICATION

Features:

- ↵ Excellent transiting heat from LED chip operating under 1000mA.
- ↵ Provide uniform cross distribution of positive white and warm white dual color scheme, mixed pure.
- ↵ High luminous output.
- ↵ No UV.
- ↵ Encapsulated materials are environmentally certified and meet environmental requirements.

Chip Material:

- ↵ GaInN

Emitting Color:


- ↵ White
- ↵ Warm white

Applications:

- ↵ Commercial lighting
- ↵ General Lighting

Part No.	TX-1825SW14A-2860V36-10H80	Spec No.	WKF-BF0336	Page	1 of 10
----------	----------------------------	----------	------------	------	---------

Package Dimensions:

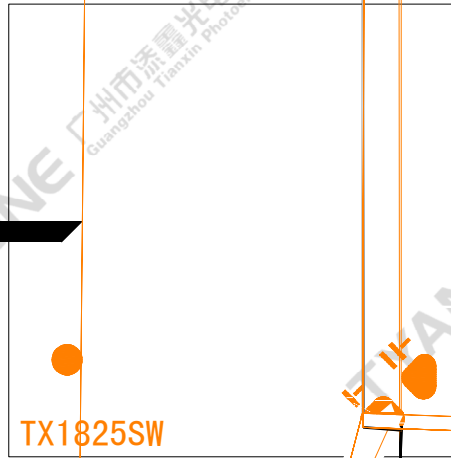

Part No.	TX-1825SW14A-2860V36-10H80	Spec No.	WKF-BF0336	Page	2 of 10
----------	----------------------------	----------	------------	------	---------

Absolute Maximum Ratings

Parameter	Symbol	Ratings	Unit	
Forward Current	IF	1000	mA	
Reverse Voltage	V _R	Not designed for reverse operation	V	
Power Dissipation	P _D	W	36	W
		S	36	
Junction Temperature	T _j	W	135	"
		S	135	
Case Temperature (C)	T _c	85	"	
Electrostatic Discharge Threshold (ESD)	ESD	2000	V	
Storage Temperature	T _{stg}	-30~+100	"	
Operation Temperature	T _{opr}	-30~+80	"	

Notes:

- Specifications are subject to change without notice.
- The data on this specification is for reference only and the actual data is in accordance with the acknowledgment.
- Precautions for ESD:
 STATIC SHIELD Electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

Part No.	TX-1825SW14A-2860V36-10H80	Spec No.	WKF-BF0336	Page	3 of 10
----------	----------------------------	----------	------------	------	---------

Electrical Optical Characteristics (Tc=25°C)

Parameter	Symbol	Condition	Emitting color	Min.	Typ.	Max.	Units
Luminous Flux	N _v	If=700mA	S	—	2250	—	lm
			W	—	2250	—	
Forward Voltage	V _f		S	34	36	38	V
			W	34	36	38	
Correlated Colour Temperature	CCT		S	—	2800	—	K
			W	—	6000	—	
Viewing Angle at 50°半IV	2 1/2		S	—	115	—	Deg
			W	—	115	—	
Reverse Current	I _R		—	—	—	—	μA
Thermal Resistance Junction to Case	R _{θJC}		S	—	0.53	—	K/W
		W	—	0.53	—		
Temperature Coefficient of Voltage	V _A F/T	S	—	-16.5	—	mV/ "	
		W	—	-16.5	—		
Color Rendering Index	Ra	S	—	80	—	—	
		W	—	80	—		

Notes:

- 1.Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. 1/2 is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- 3.Luminous flux measurement tolerance:±15%.
- 4.Forward voltage measurement tolerance:±0.15V.

TYANSHINE 广州市深鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd

TYANSHINE 广州市深鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd

TYANSHINE 广州市深鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd

TYANSHINE 广州市深鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd

TYANSHINE 广州市深鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd

TYANSHINE 广州市深鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd

TYANSHINE 广州市深鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd

TYANSHINE 广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd

TYANSHINE 广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd

TYANSHINE 广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd

TYANSHINE 广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd

TYANSHINE 广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd

TYANSHINE 广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd

TYANSHINE 广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd

广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd



TYANSHINE 广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd

TYANSHINE 广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd

TYANSHINE 广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd

TYANSHINE 广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd

TYANSHINE 广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd

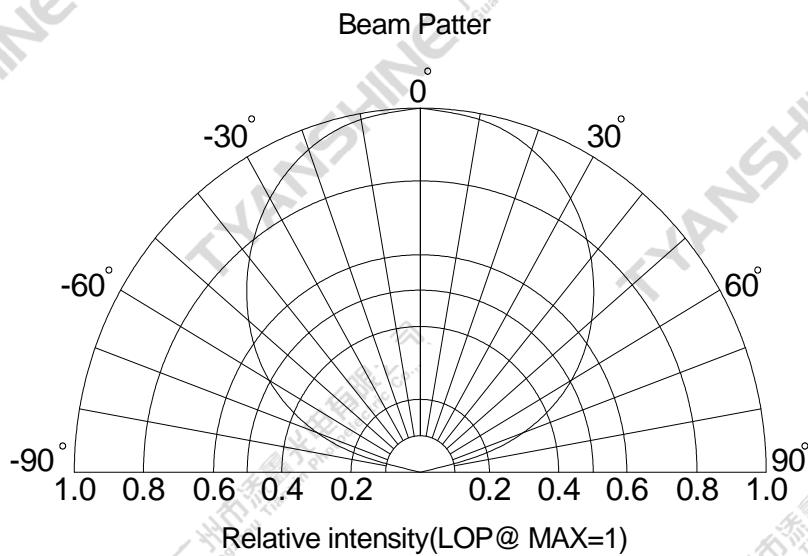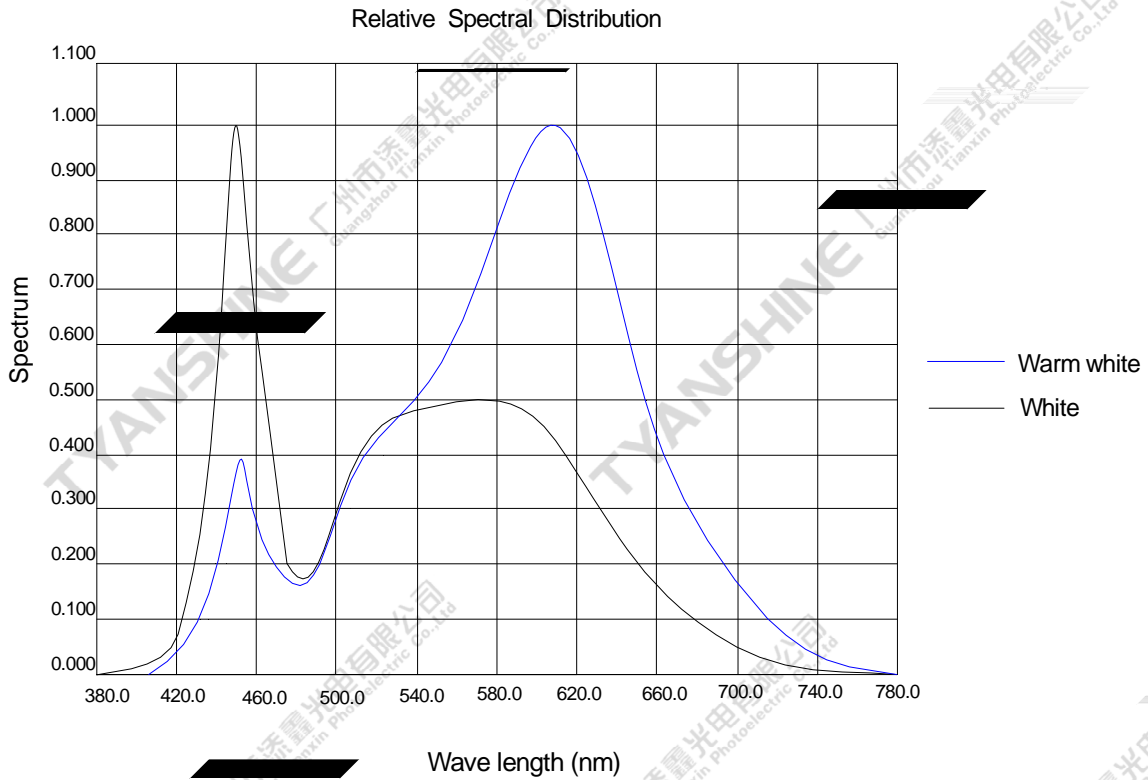


Notes:

1. $2 \frac{1}{2}$ is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value.
2. View angle tolerance is $\pm 5^\circ$.

Part No.	TX-1825SW14A-2860V36-10H80	Spec No.	WKF-BF0336	Page	8 of 10
----------	----------------------------	----------	------------	------	---------

Chromaticity Coordinates Condition IF=700mA Tc=25 " 唉

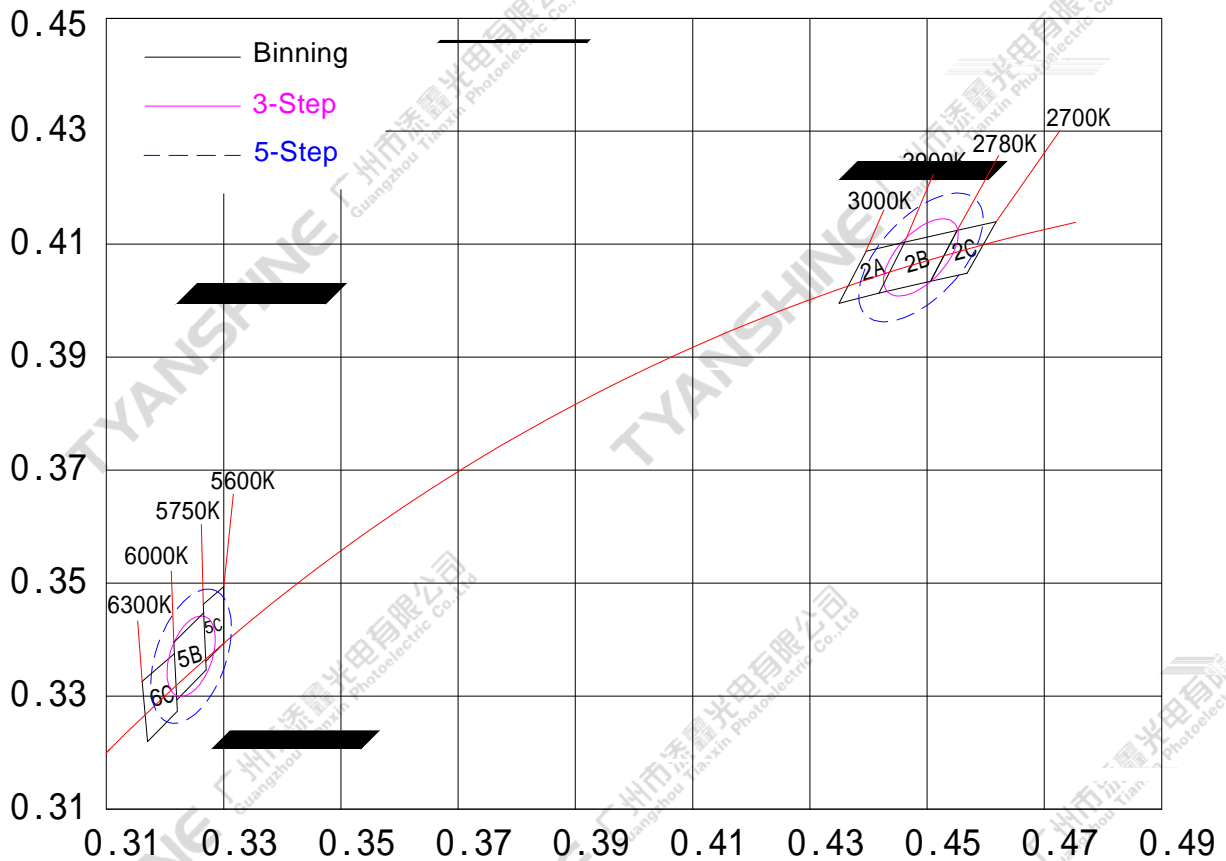


Reliability Test

Test Item	Test Condition
Continuous Operation Test	IF=700mA Ta=25 " ×1000hrs
Low Temperature Storage Test	-30 " × 1000 hours
High Temperature Storage Test	100 " × 1000 hours
Moisture-proof Test	85 " , 85 %RH for 500 hours
Thermal Shock Test	-30 " × 30 minutes – 100 " × 30 minutes, 100 cycle

Part No.	TX-1825SW14A-2860V36-10H80	Spec No.	WKF-BF0336	Page	9 of 10
----------	----------------------------	----------	------------	------	---------

Dimensions For Cannulation And Packaging

Quantity: 36PCS

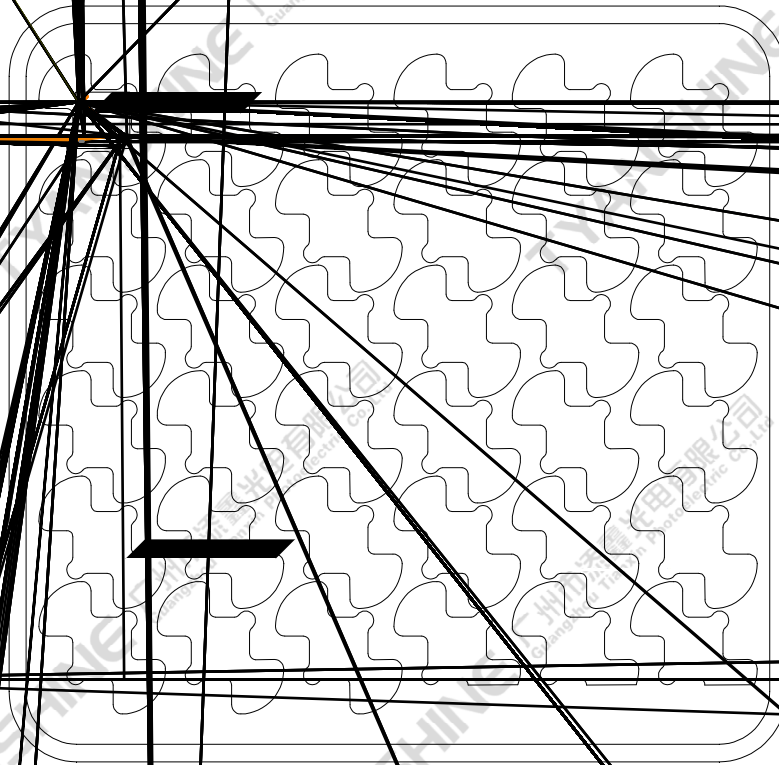

Part No.	TX-1825SW14A-2860V36-10H80	Spec No.	WKF-BF0336	Page	10 of 10
----------	----------------------------	----------	------------	------	----------