

TX-H1309SW08A-2860V36-02H90

PRODUCT SPECIFICATION

Features:

- ↵ Excellent transiting heat from LED chip operating under 400mA.
- ↵ Provide uniform cross distribution of positive white and warm white dual color scheme, mixed pure.
- ↵ High luminous output.
- ↵ No UV.
- ↵ Encapsulated materials are environmentally certified and meet environmental requirements.

Chip Material:

- ↵ GaInN

Emitting Color:

- ↵ White
- ↵ Warm white

Applications:

- ↵ Commercial lighting
- ↵ General Lighting

Part No.	TX-H1309SW08A-2860V36-02H90	Spec No.	WKF-BF0348	Page	1 of 10
----------	-----------------------------	----------	------------	------	---------

TYANSHINE

TYANSHINE 广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd.

TYANSHINE 广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd.

TYANSHINE 广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd.

TYANSHINE 广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd.

Electrical Optical Characteristics (Tc=25°C)





Notes:



- 1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
- 2. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- 3. Luminous

Part No.	TX-H1309SW08A-2860V36-02H90	Spec No.	WKF-BF0348	Page	4 of 10
----------	-----------------------------	----------	------------	------	---------


Typical Electrical/Optical Characteristics Curves

(25 ° Ambient Temperature Unless Otherwise Noted)

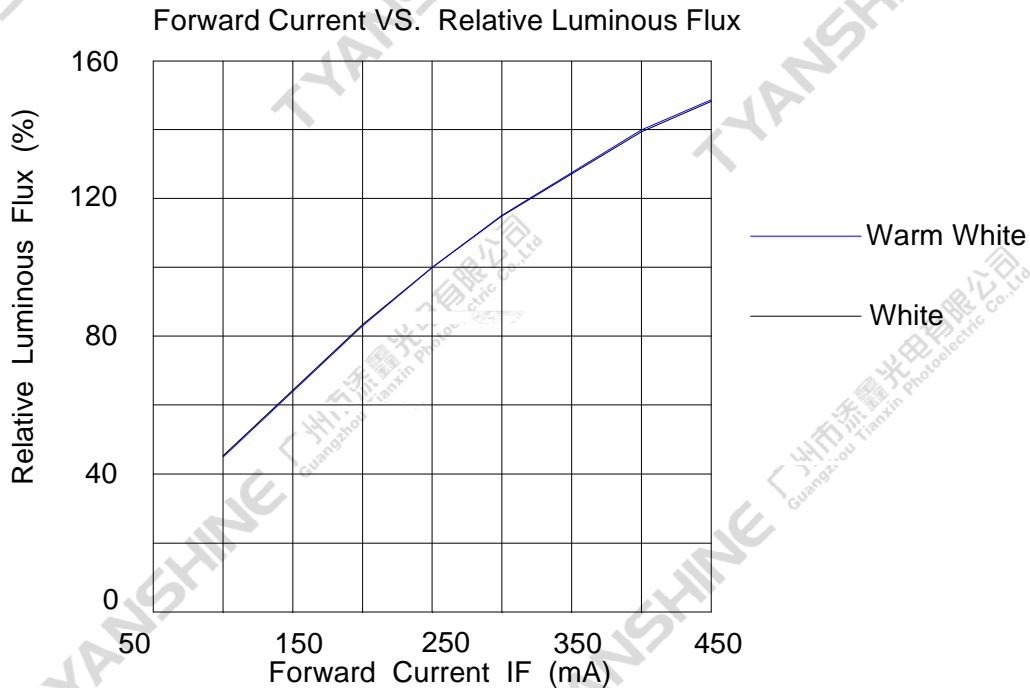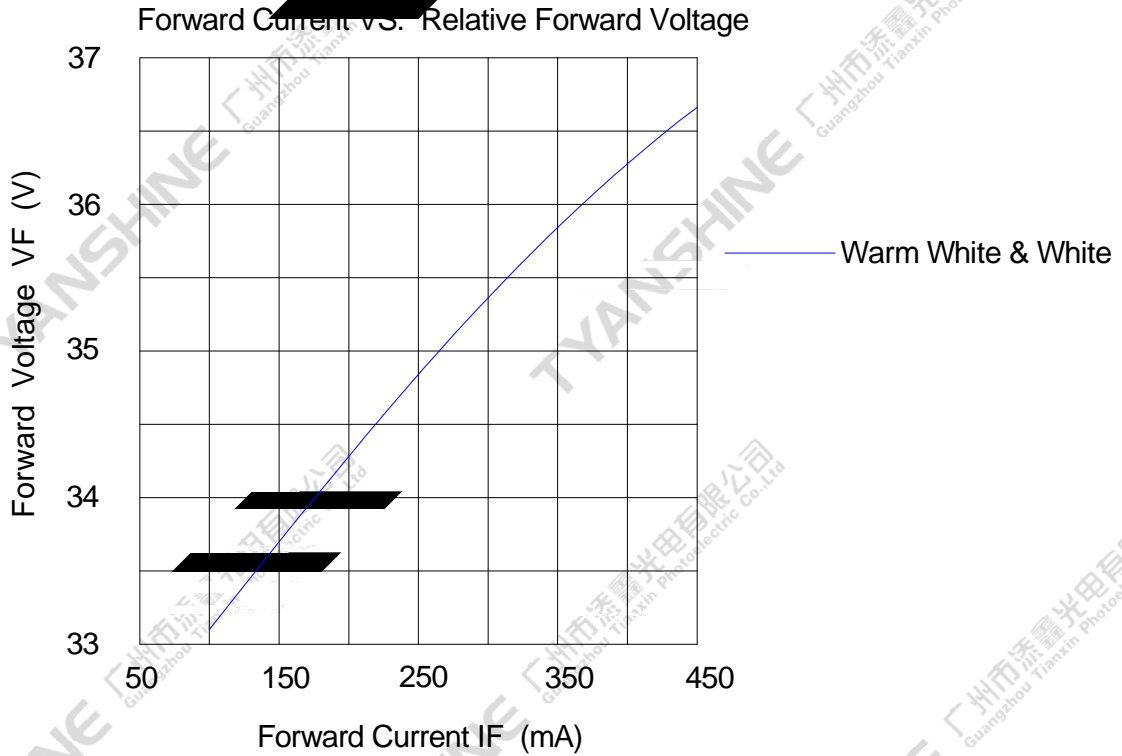

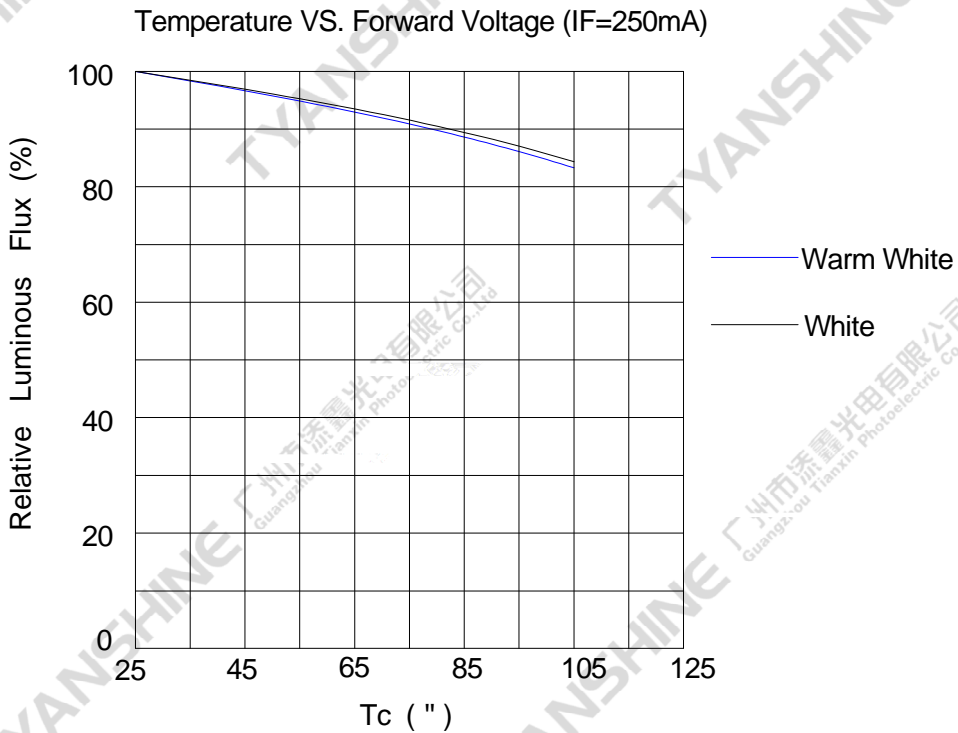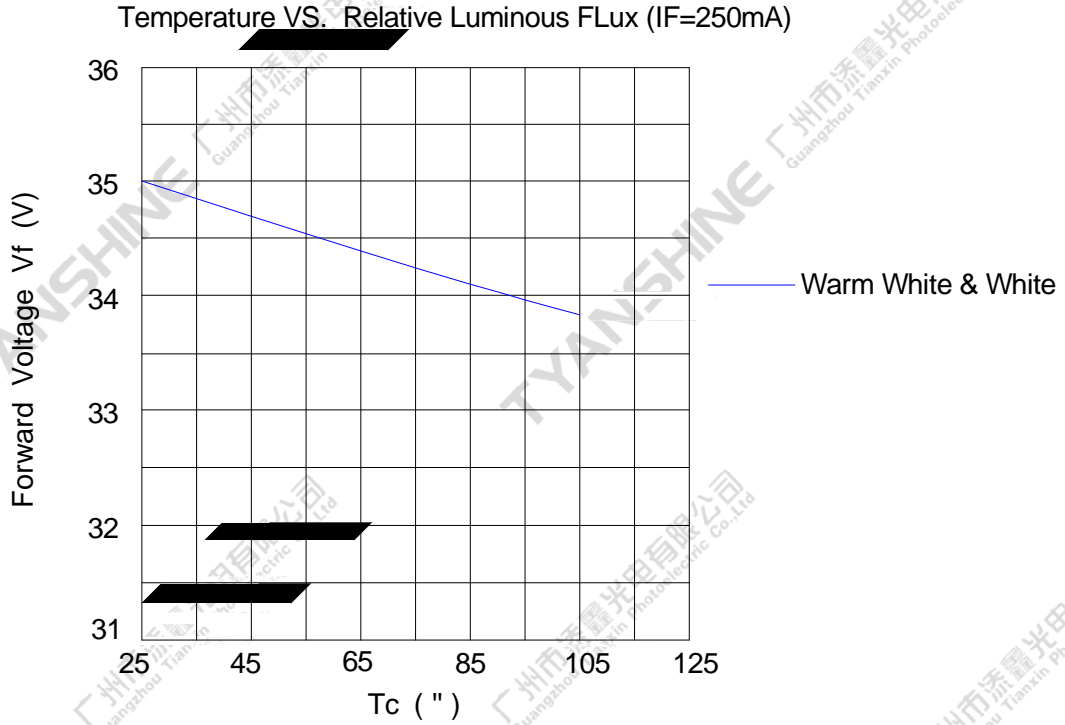


TYANSHINE

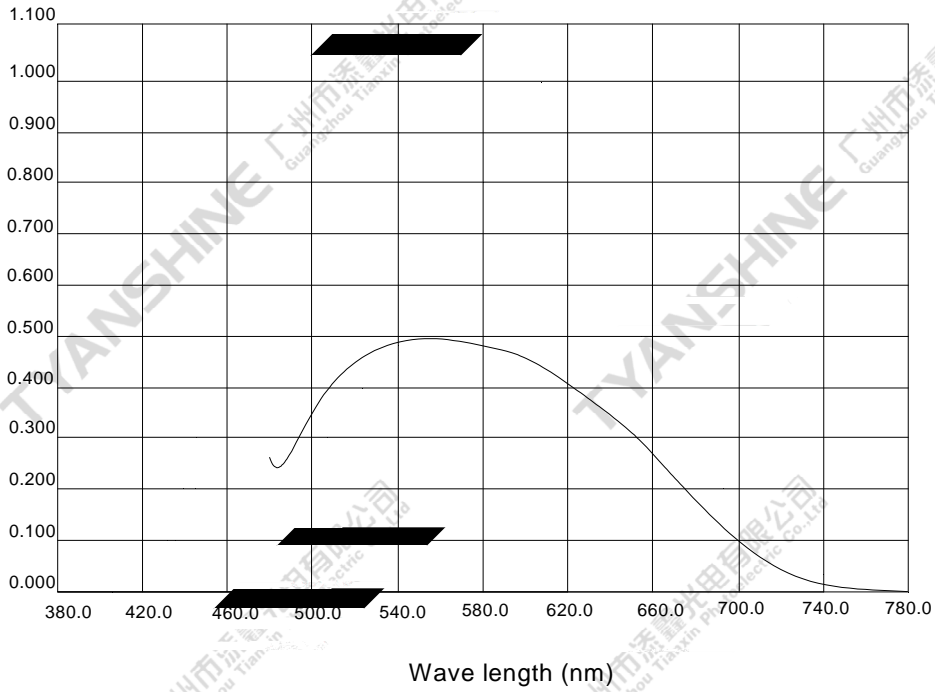

TYANSHINE 广州市添鑫光电有限公司 Guangzhou Tianxin Photoelectric Co., Ltd.

Part No.	TX-H1309SW08A-2860V36-02H90	Spec No.	WKF-BF0348	Page	8 of 10
----------	-----------------------------	----------	------------	------	---------

Chromaticity Coordinates Condition IF=250mA Tc=25 "

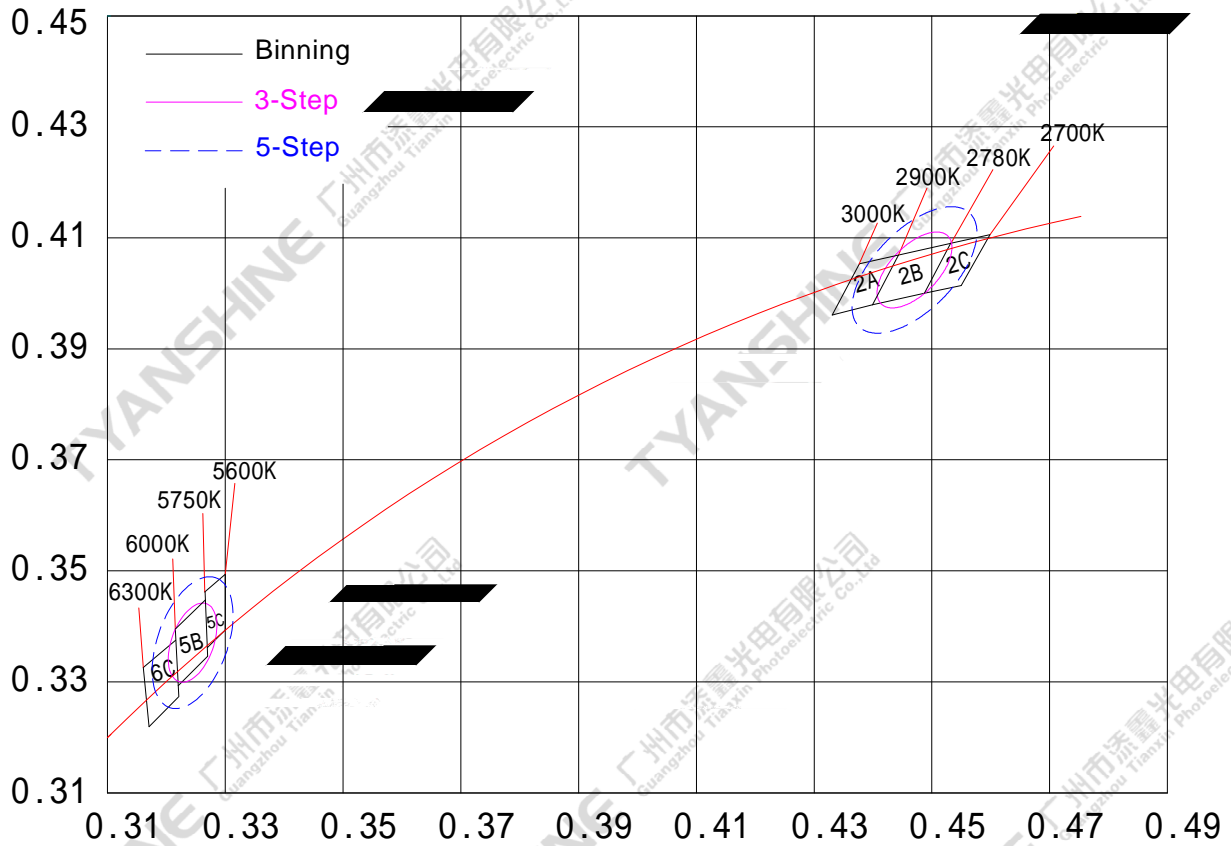

Notes:

1.chromaticity (x, y) measurements tolerance: ± 0.005 .

Reliability Test

Test Item	Test Condition
Continuous Operation Test	IF=250mA Ta=25 " x1000hrs
Low Temperature Storage Test	-30 " x 1000 hours
High Temperature Storage Test	100 " x 1000 hours
Moisture-proof Test	85 " , 85 %RH for 500 hours
Thermal Shock Test	-30 " x 30 minutes – 100 " x 30 minutes, 100 cycle

TYANSHINE

TYANSHINE 广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd.

TYANSHINE 广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd.

TYANSHINE 广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd.

TYANSHINE 广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd.

