

# TX-2020W3FSA1-NG4DA-01H80

## PRODUCT SPECIFICATION











Features:

Chip Material:

Emitting Color:

Applications:

--	--	--	--	--	--

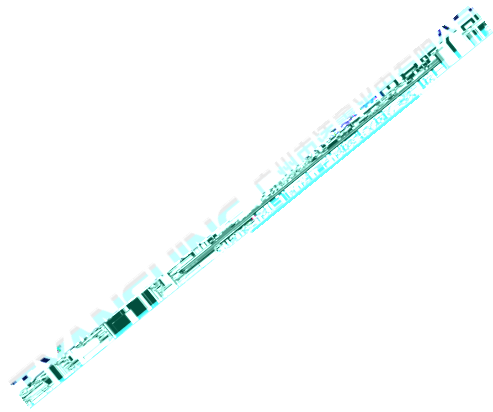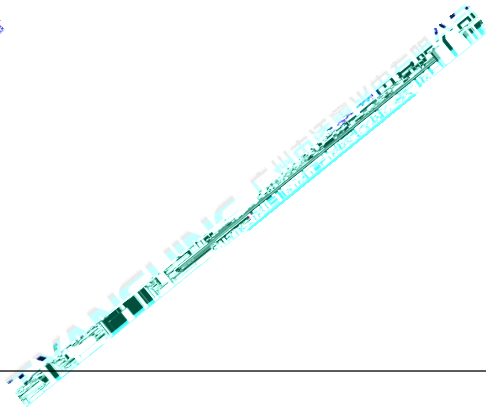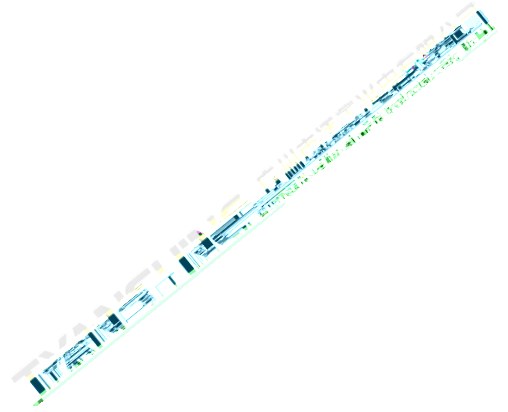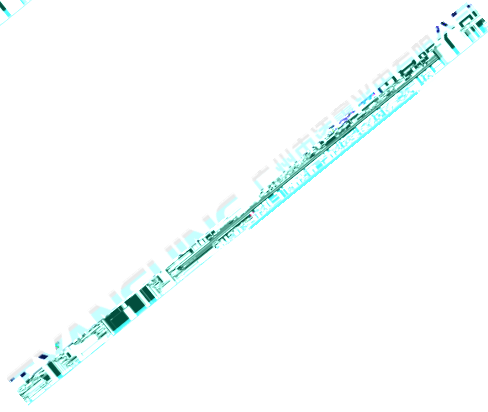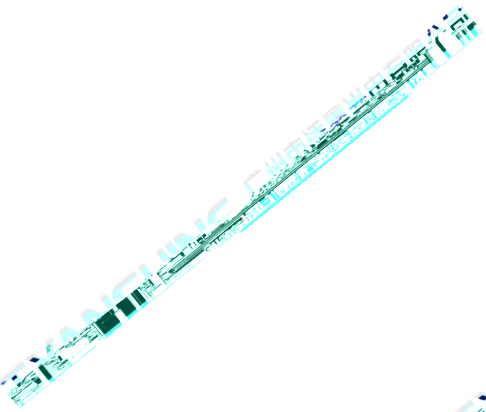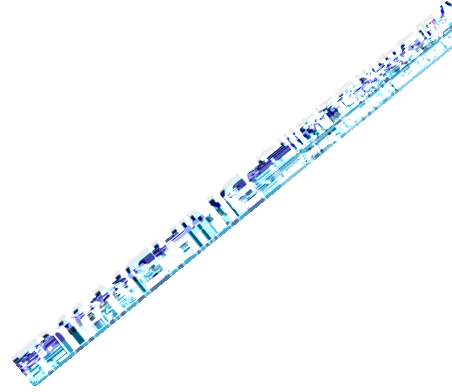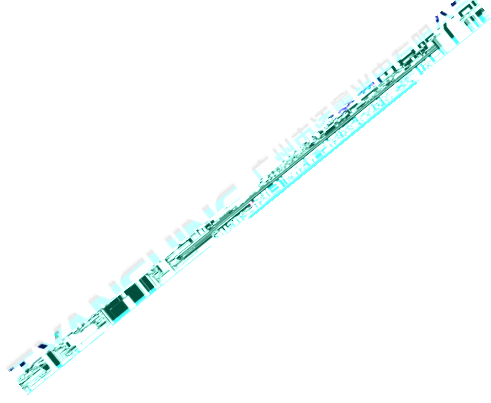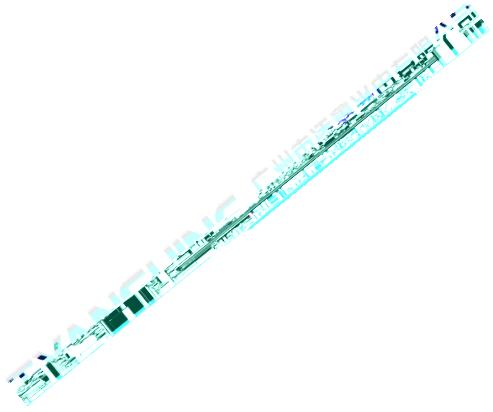

## Absolute Maximum Ratings (Tc=25 )




Parameter	Symbol	Ratings	Unit

Notes:





--	--	--	--	--	--


# Electrical Optical Characteristics

## White light Color Temperature (IF=0.3)

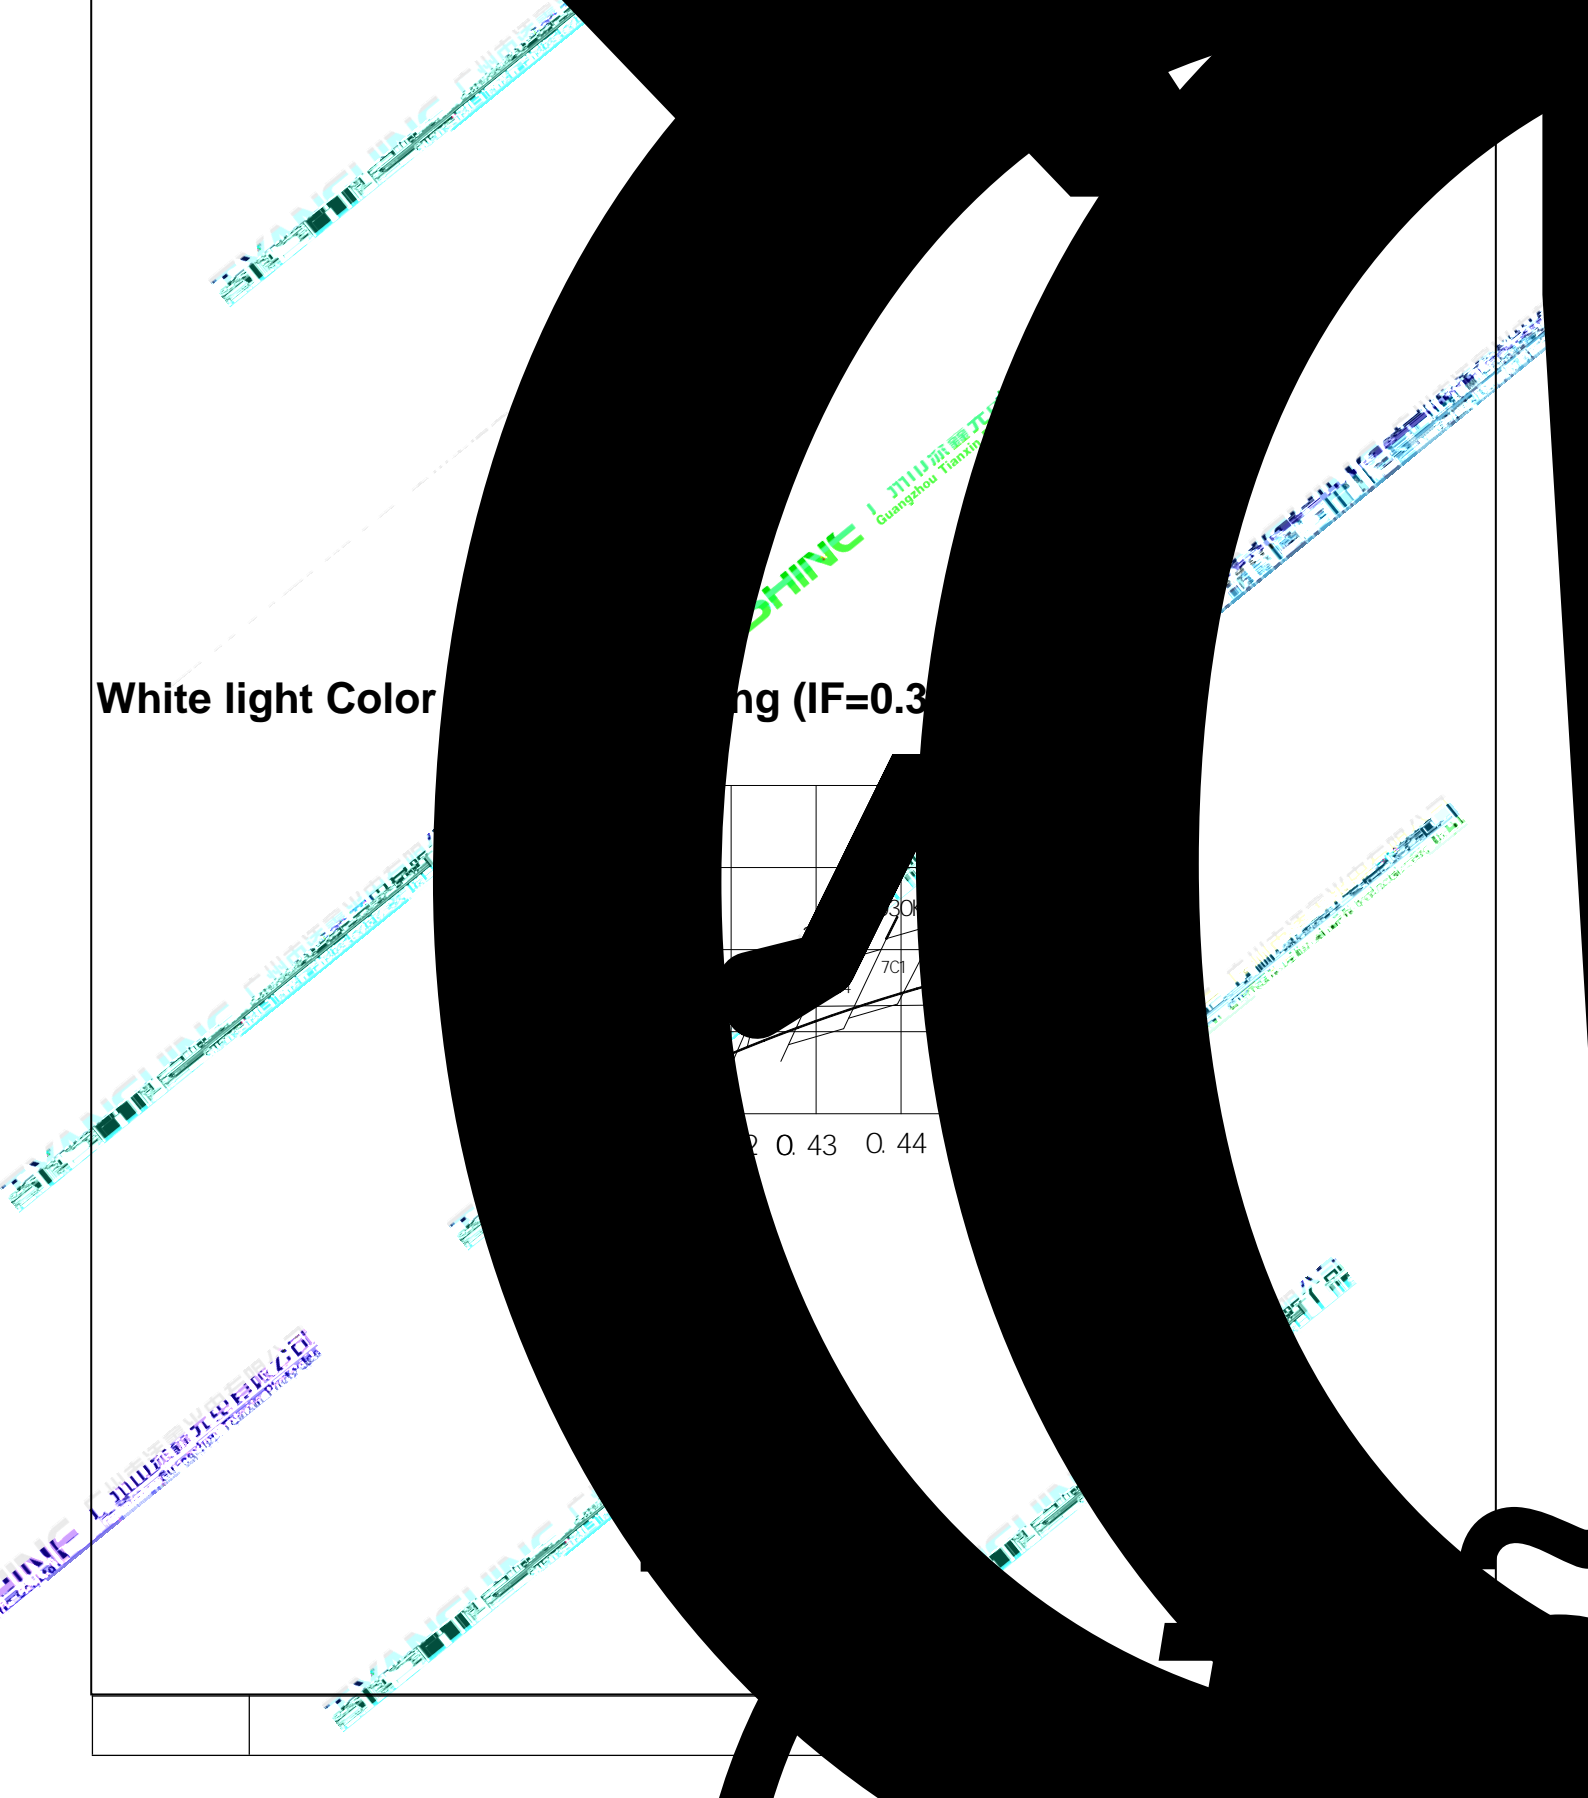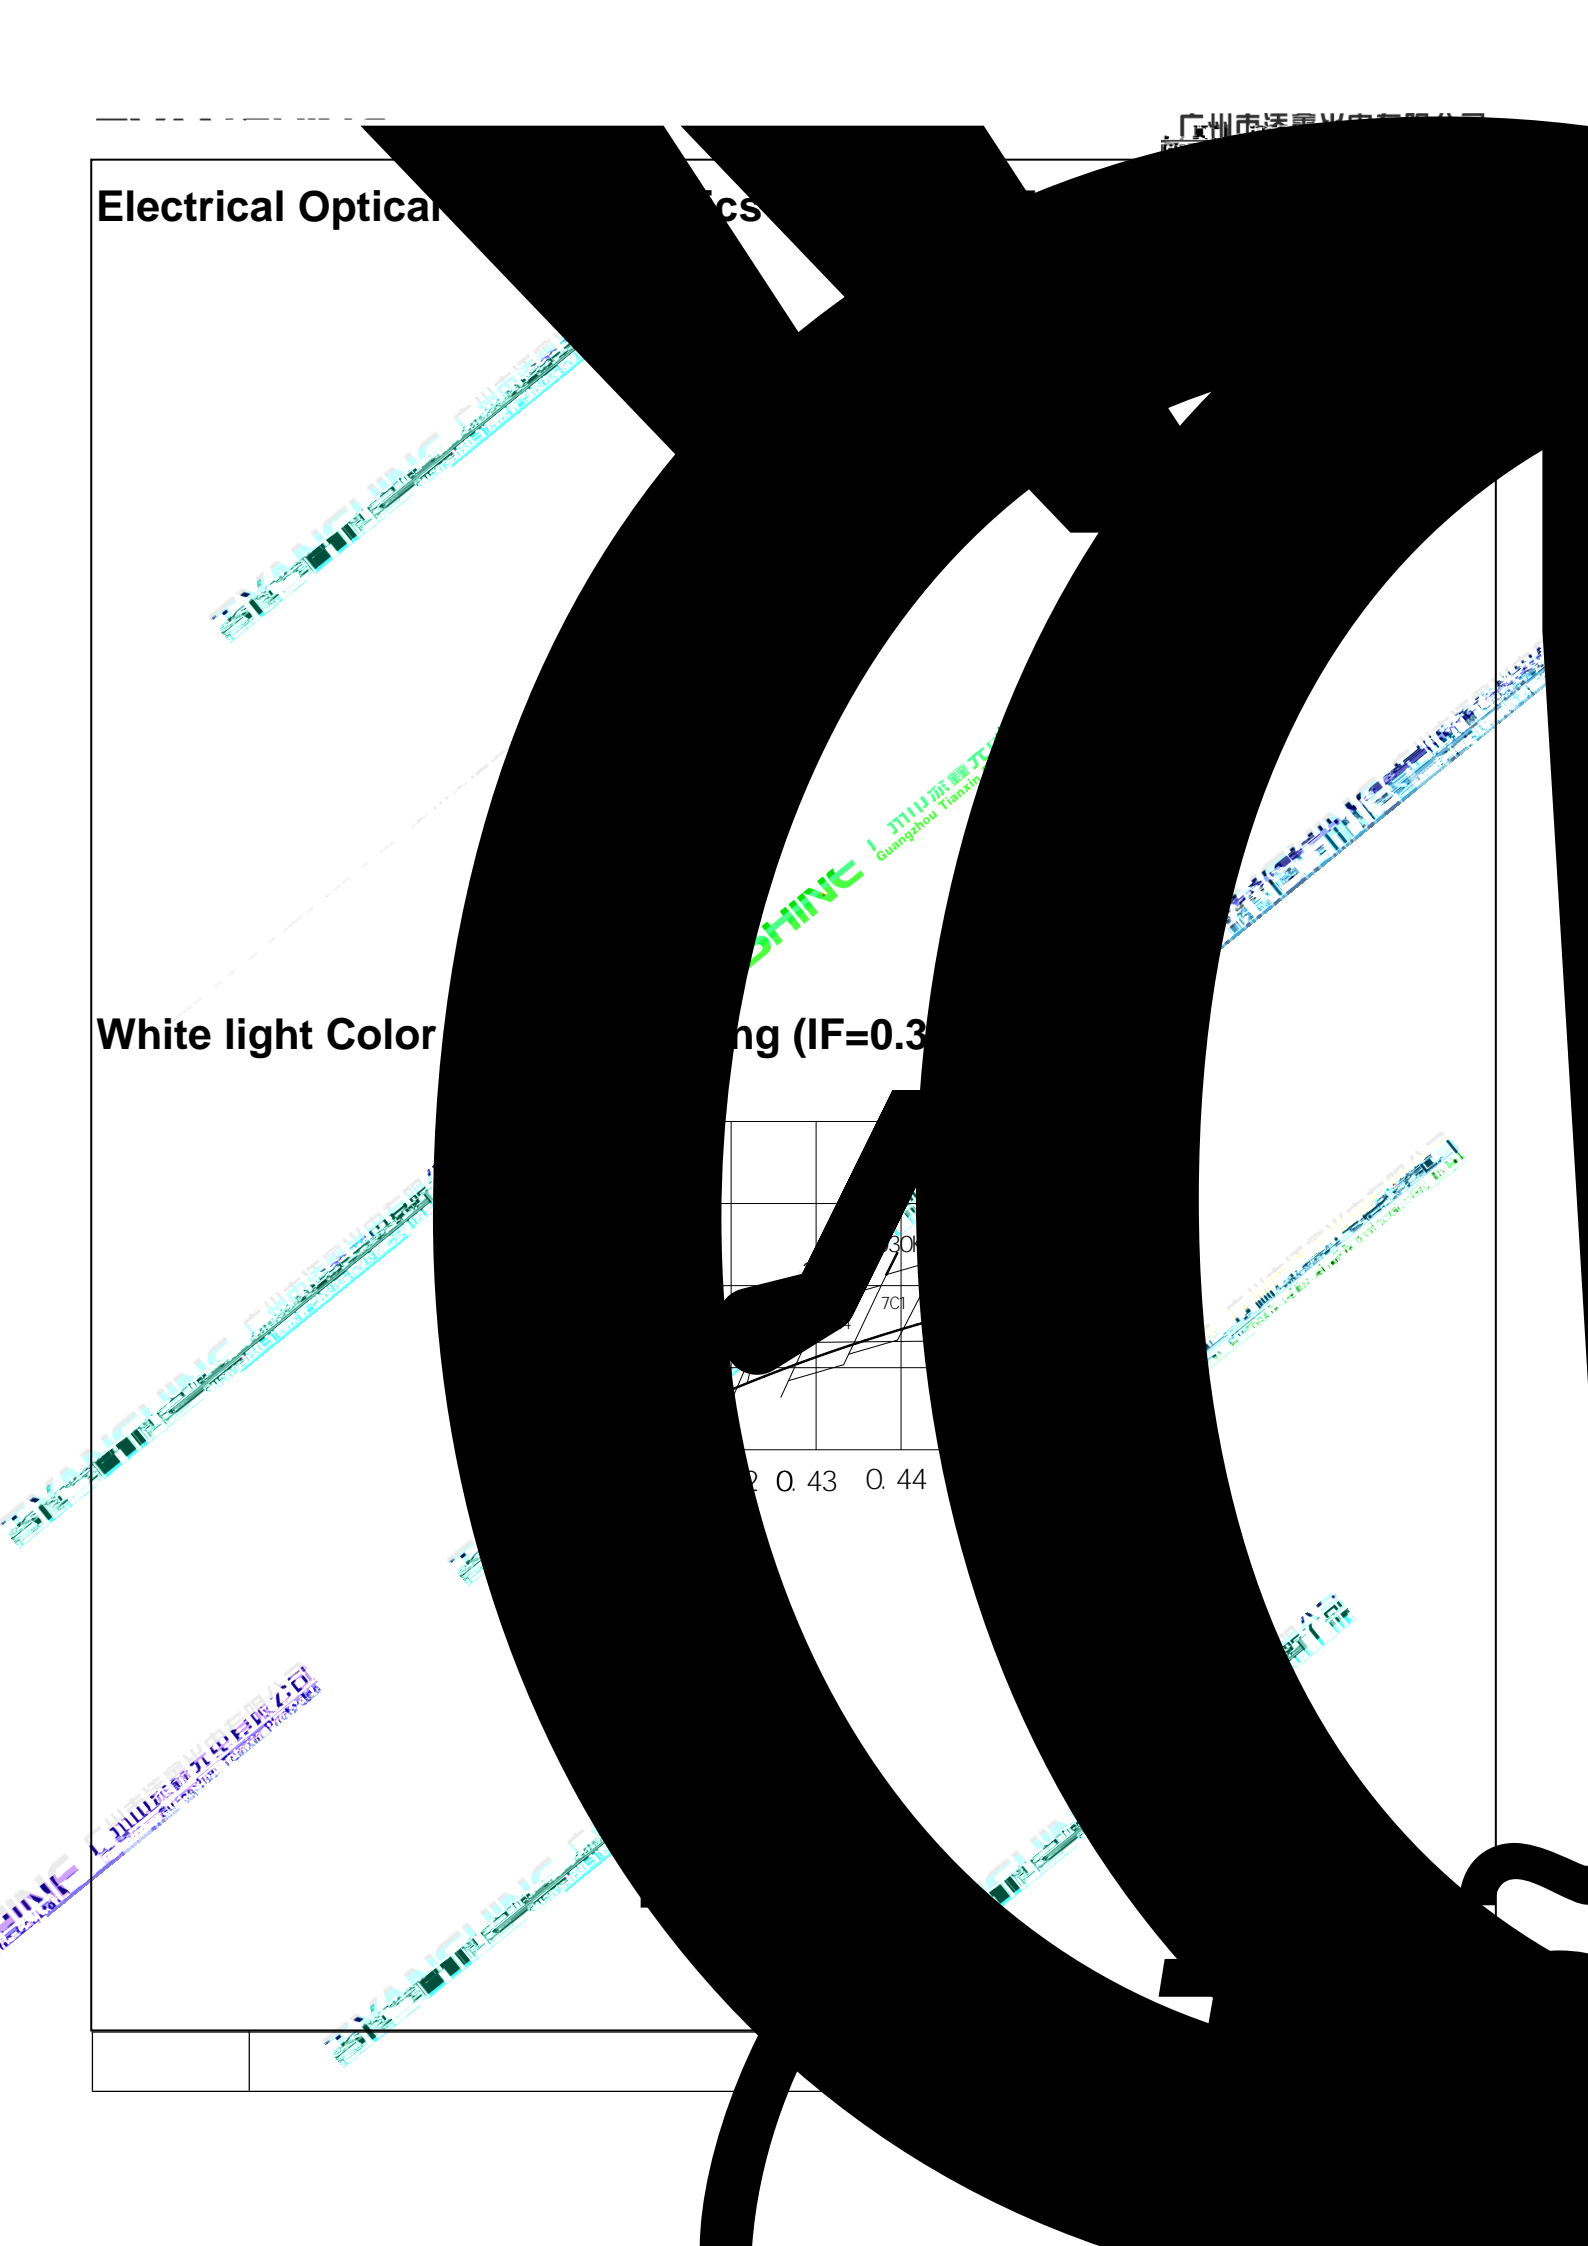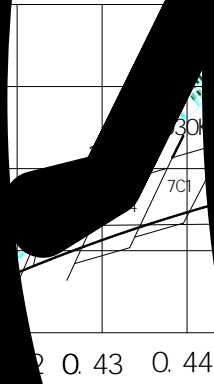

# Typical Electrical/Optical Characteristics Curves

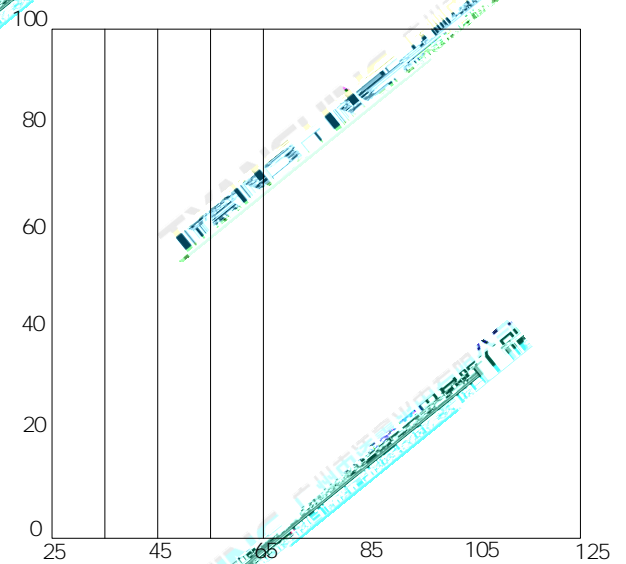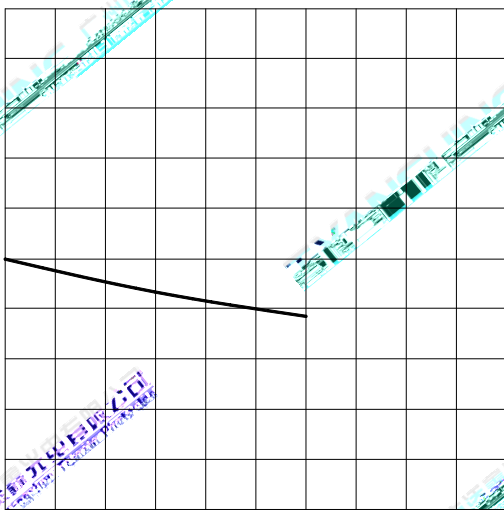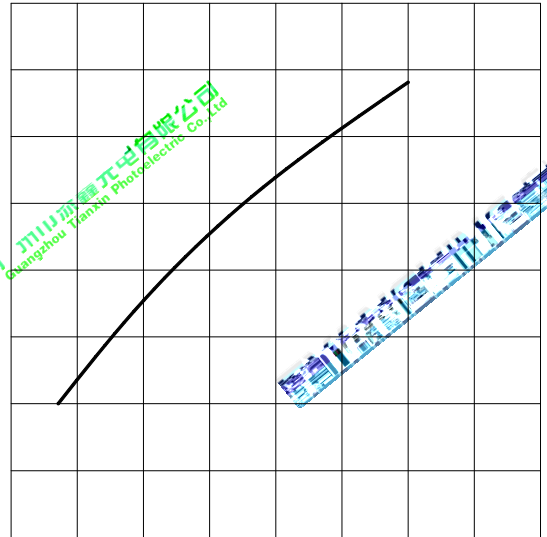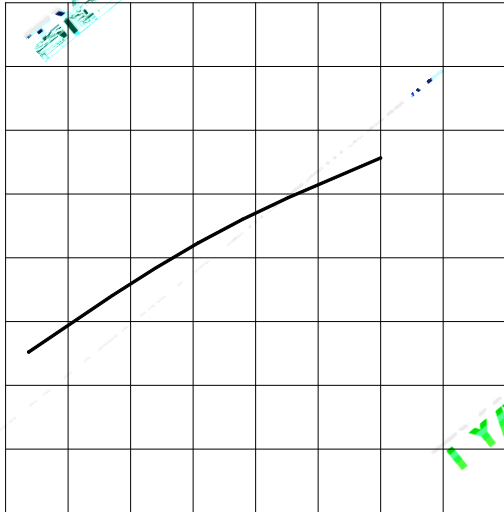

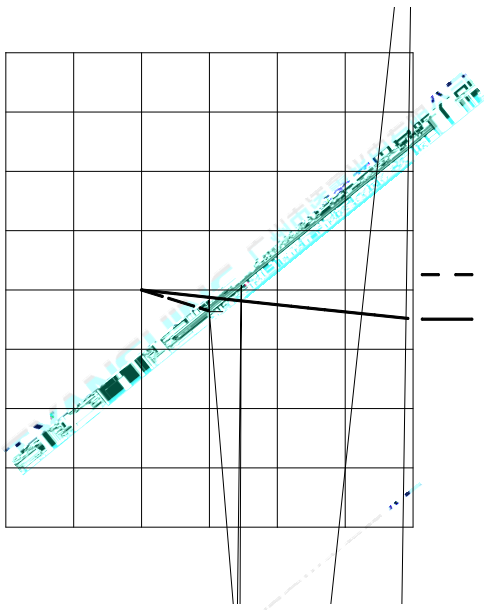


**TYANSHINE** 广州市添鑫光电有限公司  
Guangzhou Tianxin Photoelectric Co., Ltd

--	--	--	--	--	--

# Usage Precautions











## Storage Environment Condition

## Soldering Condition

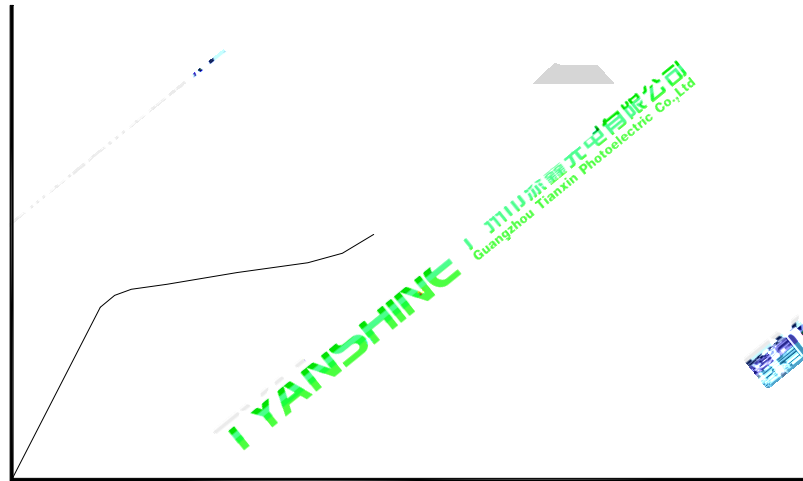

--	--	--	--	--	--

# Dimen

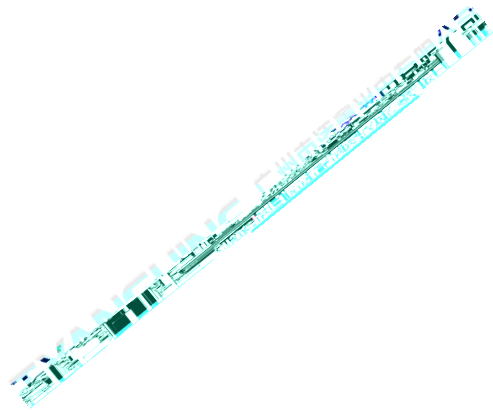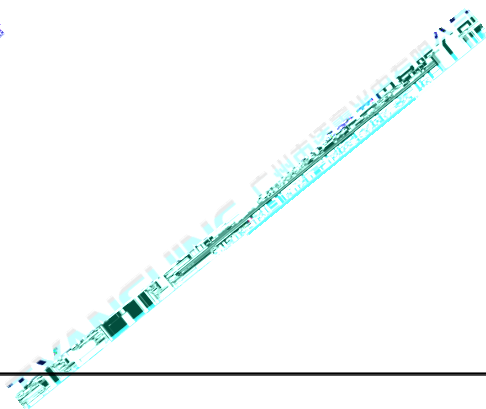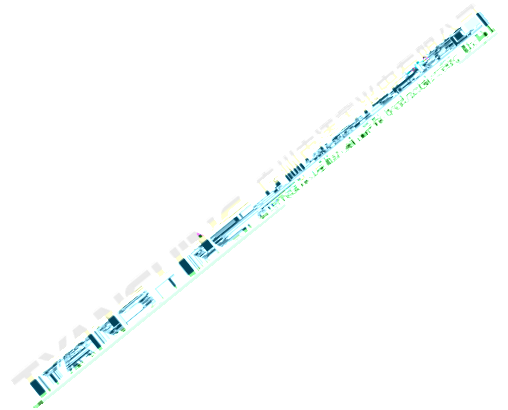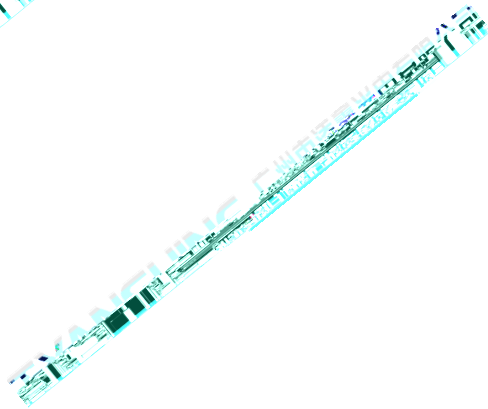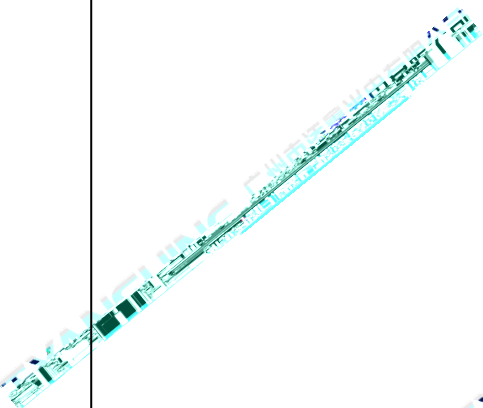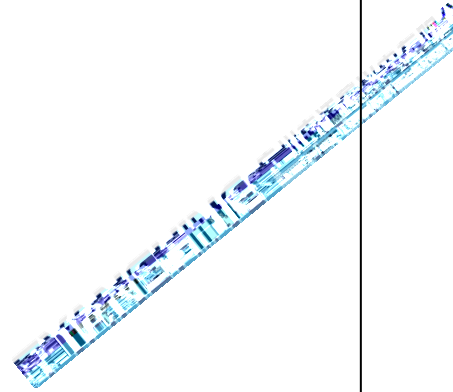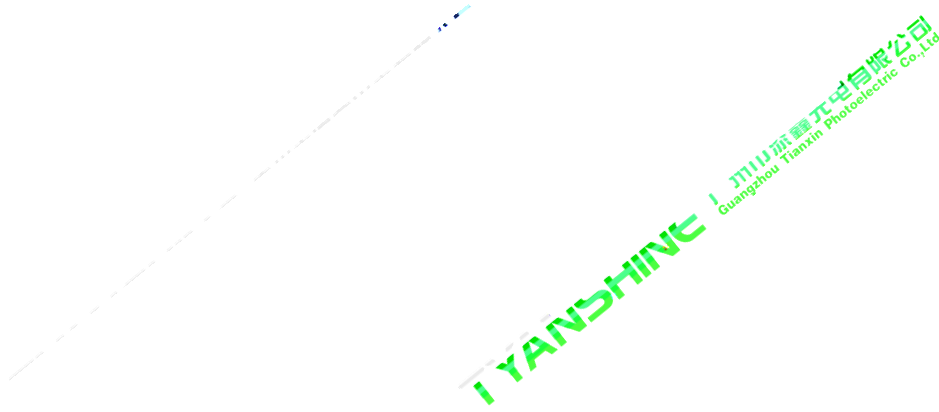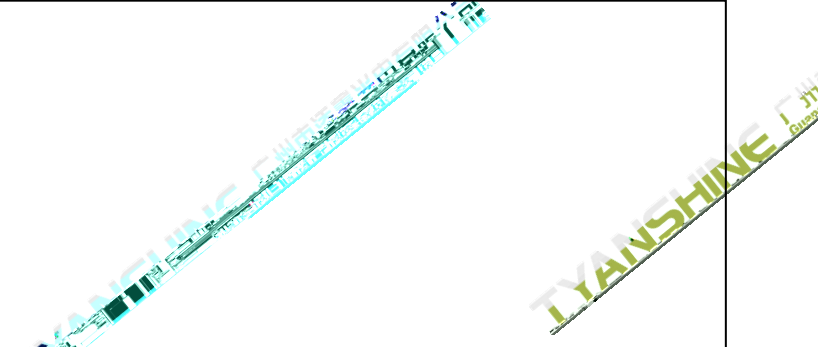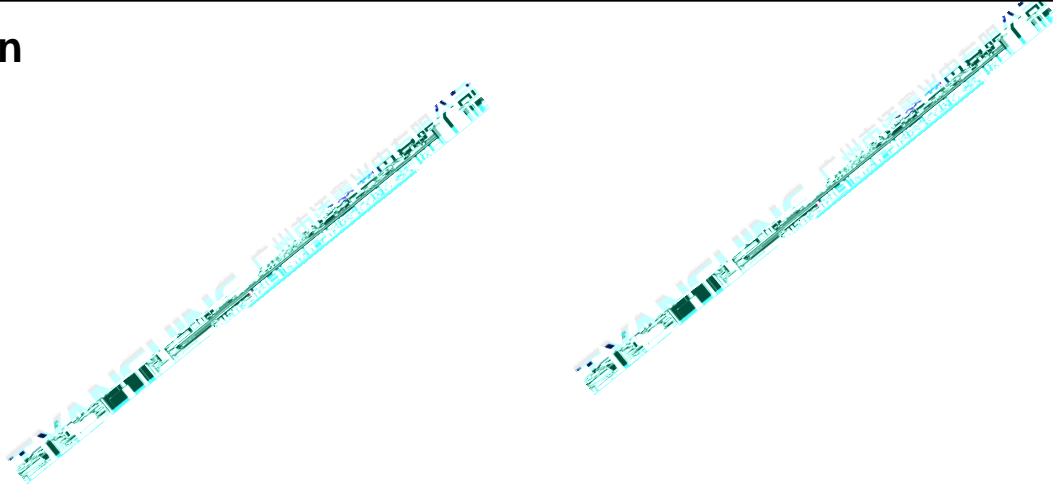

--	--	--	--	--	--