













--	--	--	--	--	--

Package Dimensions:

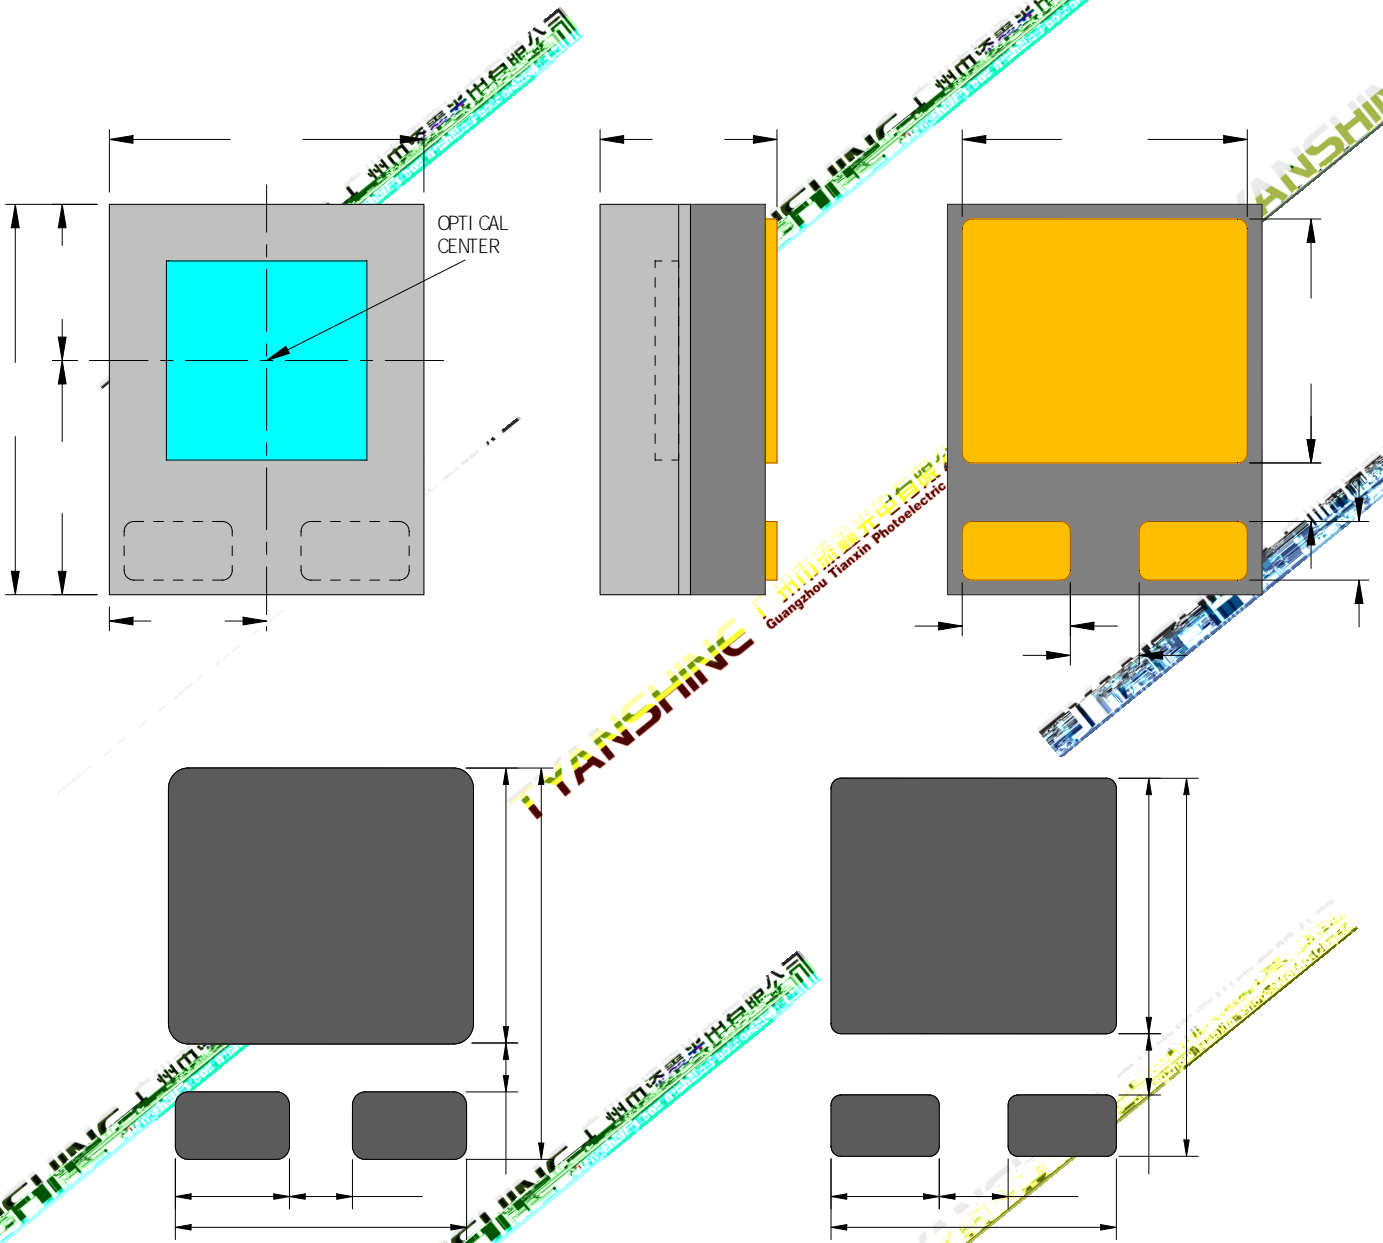

Notes:

--	--	--	--	--	--

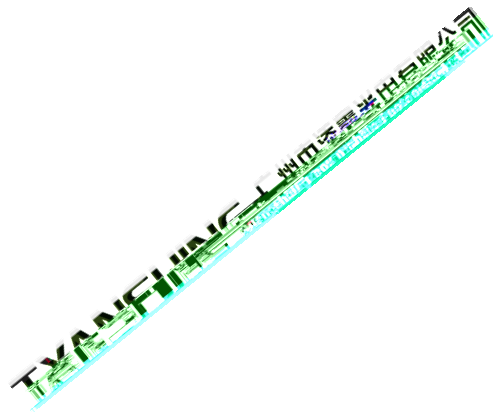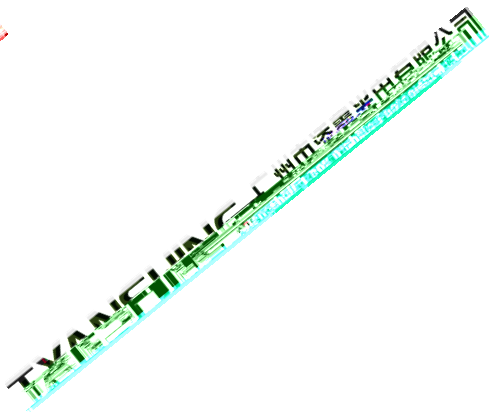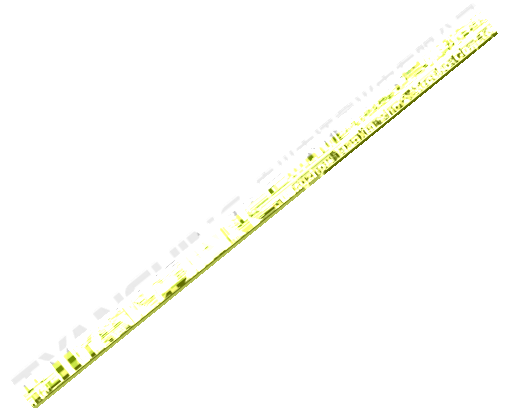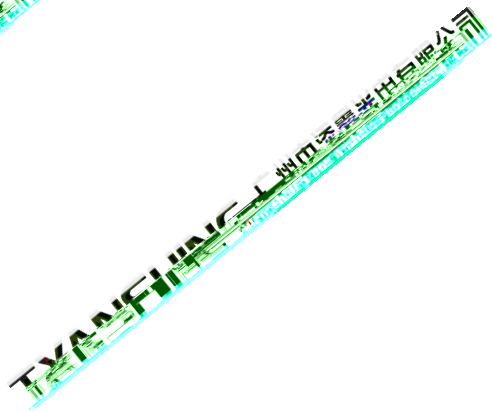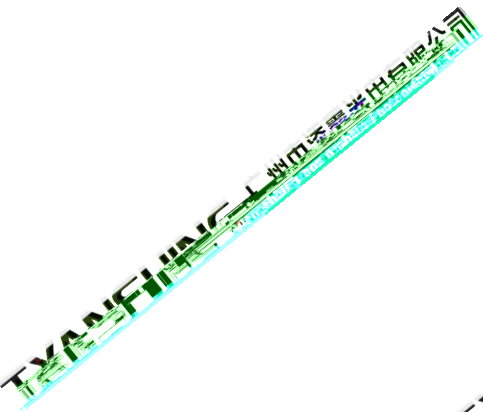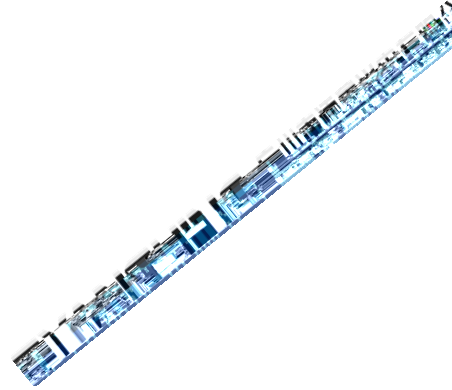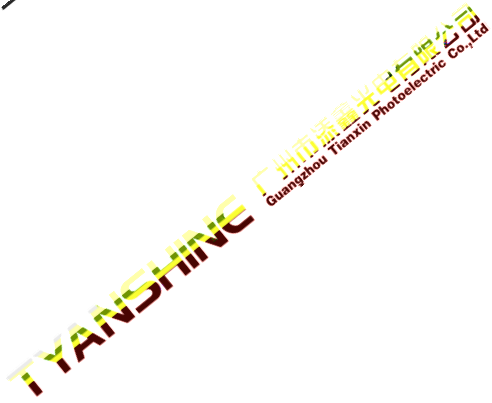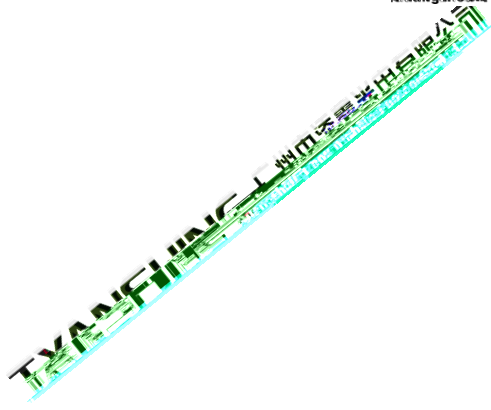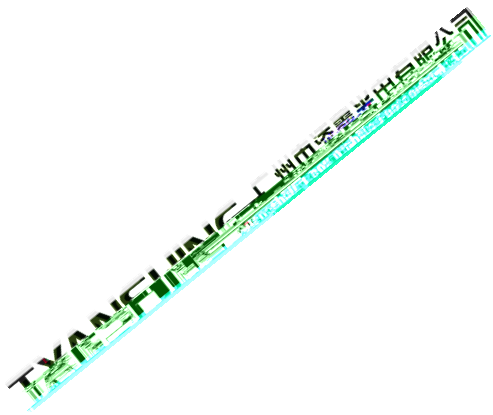

Electrical Optical Characteristics (Tc=25°C IF=1.0A)

Parameter	Symbol	Min.	Typ.	Max.	Units

Notes:


--	--	--	--	--	--

广州市番禺
Guangzhou Panyu



WIT 威灵通 有限公司
WIT INSULATION TECHNOLOGY CO., LTD.

TYANSHINE 天申
TYANSHINE

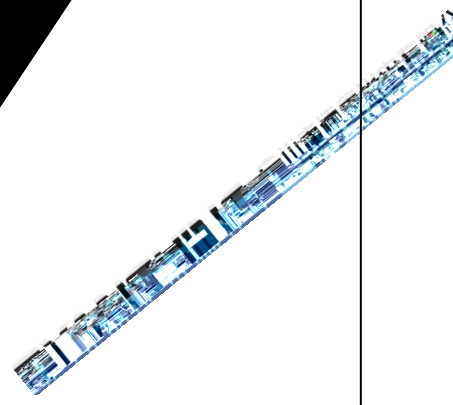

WIT 威灵通 有限公司
WIT INSULATION TECHNOLOGY CO., LTD.


TYANSHINE 天申
TYANSHINE



Usage Precautions

Storage Environment Condition



Soldering Condition

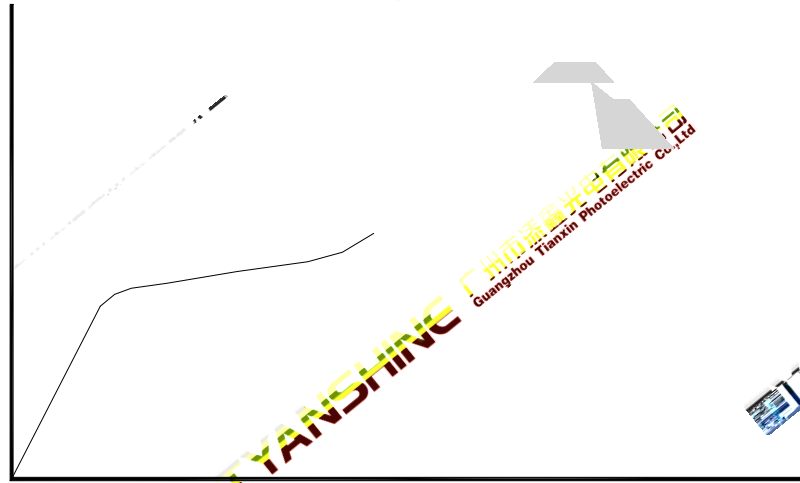

--	--	--	--	--	--

Dimensions For Cannulation And Packaging

Quantity: 3000PCS

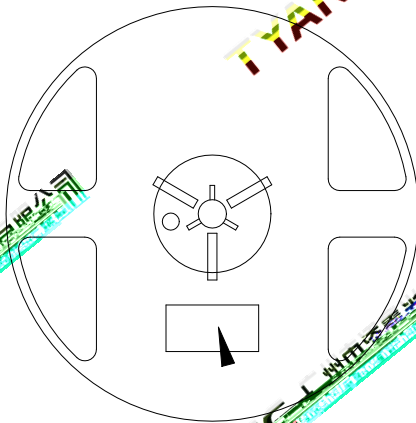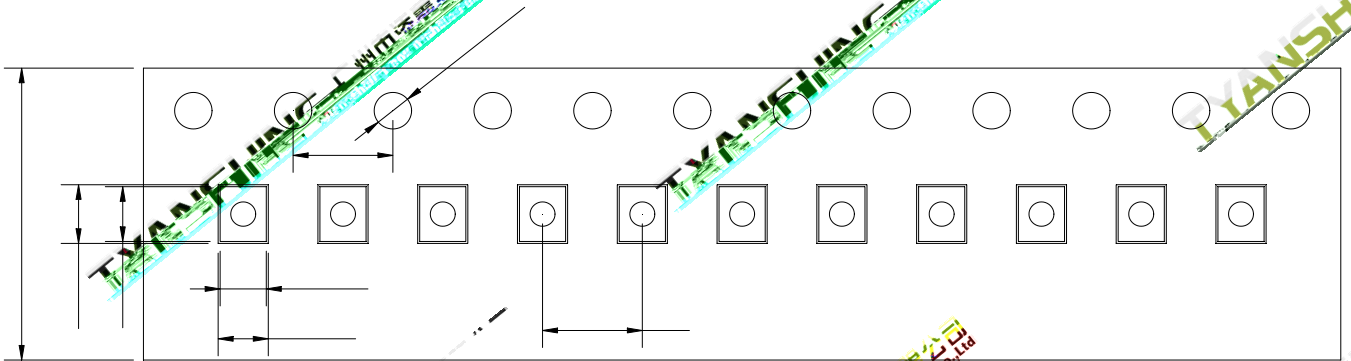

--	--	--	--	--	--